

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
9 June 2005 (09.06.2005)

PCT

(10) International Publication Number  
**WO 2005/052389 A1**

(51) International Patent Classification<sup>7</sup>: **F16B 13/04**,  
5/02, 33/02, 39/30, B41J 29/02, G03G 15/00

(74) Agent: **NISHIWAKI, Tamio**; Ginza Gas Hall Bldg. 3F,  
9-15, Ginza 7-chome, Chuo-ku, Tokyo, 1040061 (JP).

(21) International Application Number:  
PCT/JP2004/017539

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date:  
18 November 2004 (18.11.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2003-399902 28 November 2003 (28.11.2003) JP

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **RICOH COMPANY, LTD.** [JP/JP]; 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo, 1438555 (JP).

(72) Inventors; and


(75) Inventors/Applicants (*for US only*): **ISHINO, Keiji** [JP/JP]; c/o RICOH COMPANY, LTD., 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo, 1438555 (JP). **KONDOU, Takafumi** [JP/JP]; c/o RICOH COMPANY, LTD., 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo, 1438555 (JP).

Published:

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: FASTENING STRUCTURE, FASTENING METHOD AND FASTENING MEMBER

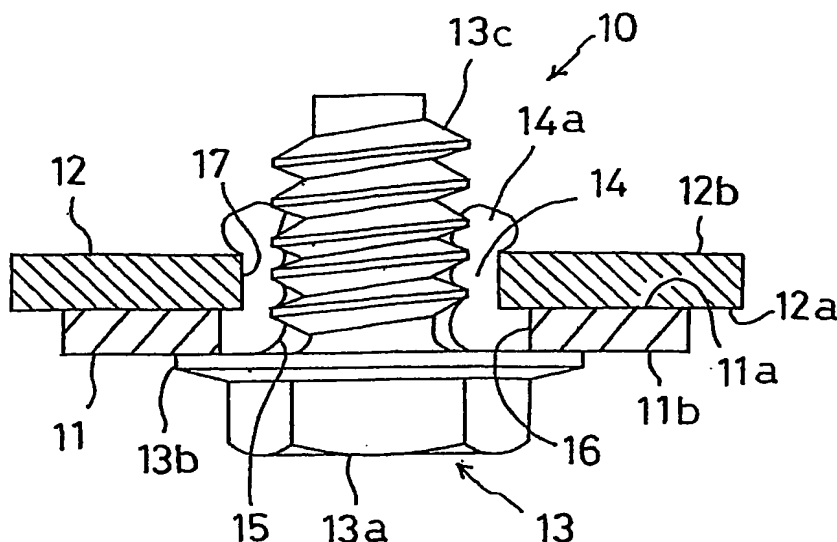

(57) Abstract: A fastening structure (10) in which a first member (11) and a second member (12) are mutually connected, the second member (12) is formed with a hole (16), the first member (11) is formed with a tubular projecting portion (14), the hole (17) is inserted into the tubular projecting portion (12), a fastening member (13) including a threaded portion 13c having an outer diameter larger than a minimum inside diameter of the tubular projecting portion (14) and smaller than a hole diameter of the second member (12) is screwed into the tubular projecting portion (14) in the axis line direction, and by this screwing of the fastening member (13) into the tubular projecting portion (14), the tubular projecting portion is expanded to expand radially and outwardly, and then an outer circumference surface of the tubular projecting portion is pressed onto the

peripheral wall of the hole (17) of the second member (12).